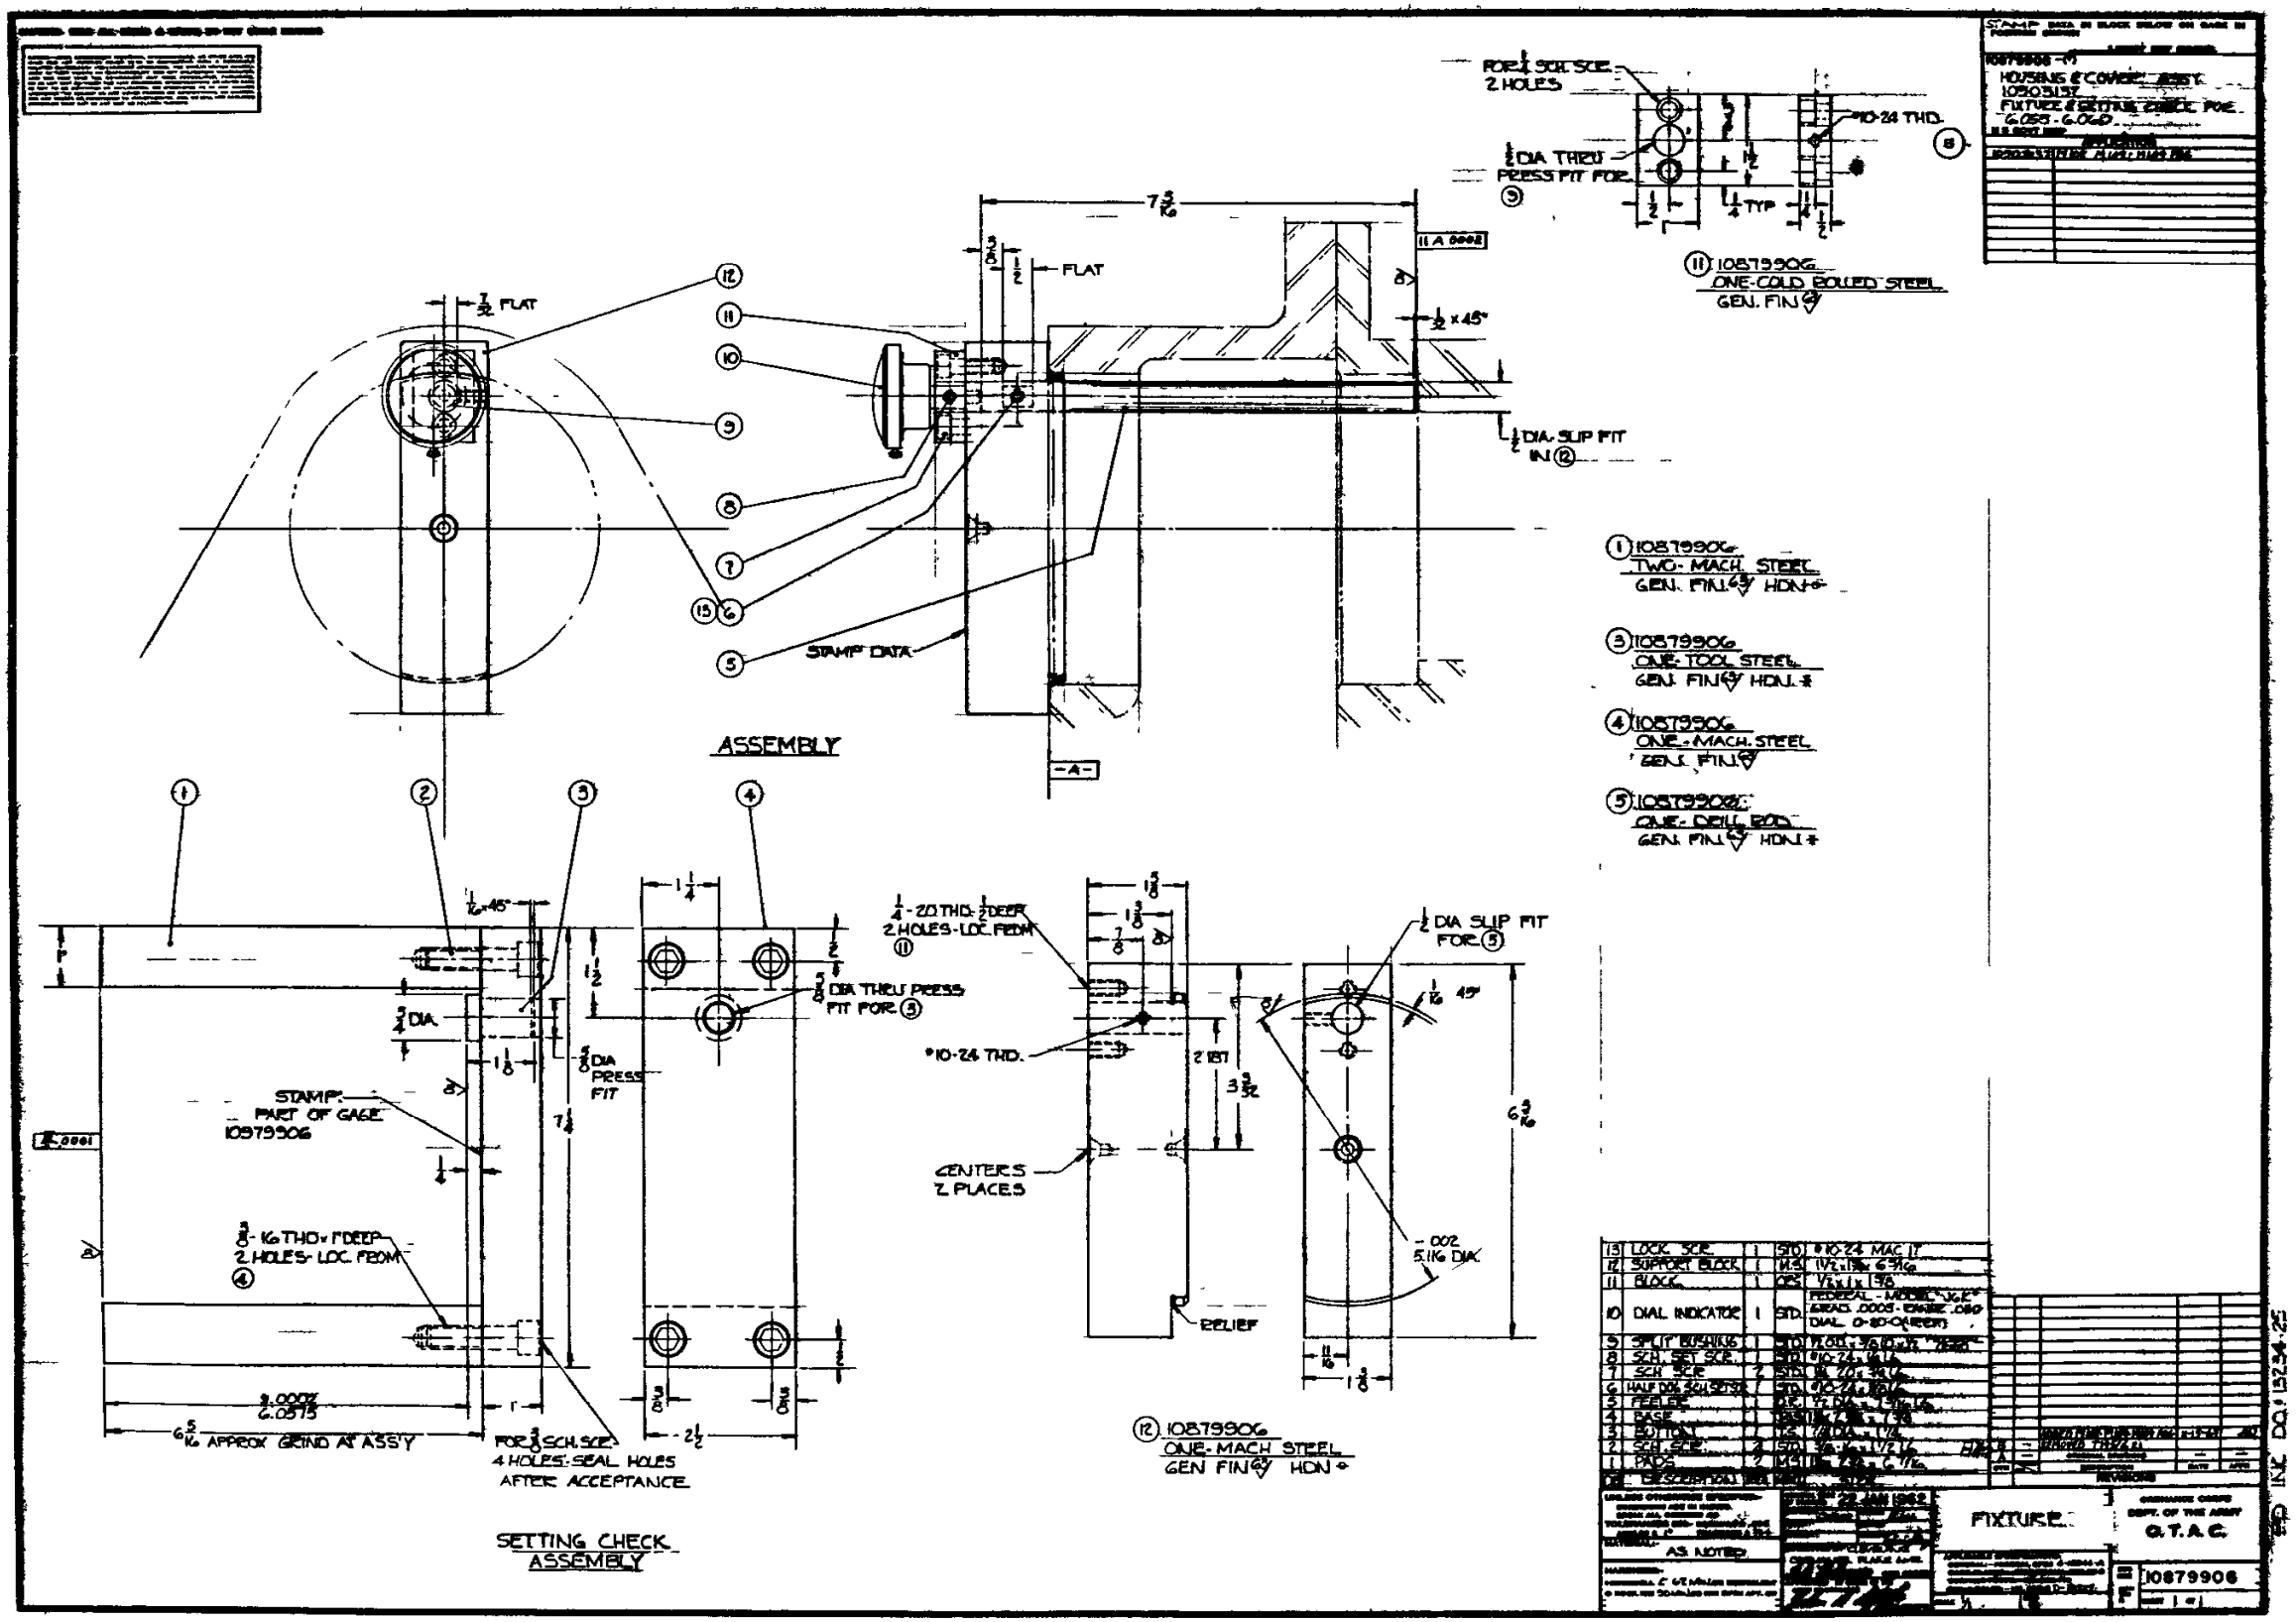
ASSEMBLY
SETTING CHECK ASSEMBLY
STAMP DATA
FLAT
$\frac{1}{2}$ DIA. SLIP FIT IN (12)
(11) 10879906 ONE-COLD ROLLED STEEL GEN. FIN
(1) 10879906 TWO-MACH. STEEL GEN. FIN HDN
(3) 10879906 ONE-TOOL STEEL GEN. FIN HDN
(4) 10879906 ONE-MACH. STEEL GEN. FIN
(5) 10879906 ONE-DRILL ROD GEN. FIN HDN
(12) 10879906 ONE-MACH STEEL GEN FIN HDN
STAMP: PART OF GAGE 10879906
$\frac{3}{8}$-16 THD x 1 DEEP 2 HOLES-LOC. FROM (4)
6 $\frac{5}{16}$ APPROX GRIND AT ASS'Y
FOR $\frac{3}{8}$ SCH. SCR. 4 HOLES-SEAL HOLES AFTER ACCEPTANCE
$\frac{5}{8}$ DIA THRU PRESS FIT FOR (3)
$\frac{5}{8}$ DIA PRESS FIT
$\frac{1}{4}$-20 THD-$\frac{1}{2}$ DEEP 2 HOLES-LOC. FROM (11)
#10-24 THD.
CENTERS 2 PLACES
RELIEF
$\frac{1}{2}$ DIA SLIP FIT FOR (5)
5.116 DIA
FOR $\frac{1}{4}$ SCH. SCR. 2 HOLES
$\frac{1}{4}$ DIA THRU PRESS FIT FOR (9)
#10-24 THD.
13 LOCK SCR. 1 STD #10-24 MAC
12 SUPPORT BLOCK 1
11 BLOCK 1
10 DIAL INDICATOR 1 STD. FEDERAL - MODEL
9 SPLIT BUSHING 1 STD
8 SCH. SET SCR. 1 STD
7 SCH. SCR. 2 STD
6 HALF DOG SCH. SET SCR. 1 STD
5 FEELER 1
4 BASE 1
3 BUTTON 1
2 SCH. SCR. 2 STD
1 PADS 2
22 JAN 1962
AS NOTED
FIXTURE
O.T.A.C.
10879906